

GFCIs TradeMaster® & Specification Grade GFCI Receptacles

GFCIs with patented SafeLock™ Protection
If critical components are damaged and ground fault protection is lost, power to receptacle is disconnected.

High-impact-resistant, thermoplastic construction for superior strength and durability.

Back wire clamp allows for fast installation of ground wires.



Trip indicator light (LED) makes it easy to identify tripped condition.

Captive screws make for easier installation.

Two back wire holes per termination add wiring flexibility, eliminate pigtailing, and save box space.

Extra-long strap for better sheet rock contact eliminates “floaters” yet takes standard wall plate.


1595LA

Side or internal screw-pressure-plate back wire termination takes #10–#14 AWG stranded or solid, copper or copper-clad conductors.

1/4" thinner than competitors' GFCIs; leaves more room for wires in the box.

The most durable GFCI available. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles.

FSUL Listed (Federal Specification WC596).

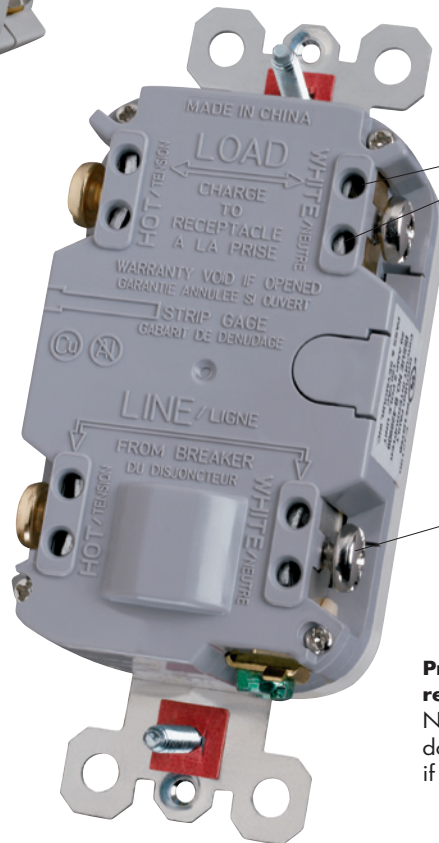

Prevents line-load reversal miswire: No power to the face or downstream receptacles if wired incorrectly.

GFCIs TradeMaster® & Specification Grade GFCI Receptacles


2 Pole, 3 Wire Grounding 15 & 20A, 125VAC

Pass & Seymour




GFCIs


Features	
<ul style="list-style-type: none"> SafeLock™ Protection: if critical components are damaged and ground fault protection is lost, power to receptacle is disconnected. Prevents line-load reversal miswire: no power to the face or downstream receptacles if wired incorrectly. Exceeds UL943 voltage surge requirements; survives 100x the required UL 3kA/6kV voltage surge test cycles. FSUL Listed (Federal Specification WC596). Trip indicator light (red LED). Side or internal screw-pressure-plate back wire with #10 – #14 AWG solid or stranded copper wire. Two back wire holes per terminal. Ground screw has a back wire clamp for easy installation. 	<ul style="list-style-type: none"> 1/4" thinner than competitors' GFCIs; leaves more room for wires in the box. Mounting screws are shipped captive in the device and wall plate for easier installation. High-impact-resistant thermoplastic construction. Extra-long strap. Button colors match the device face. Dual-direction test and reset buttons. Class A rated GFCI. Supplied with matching TP26 nylon wall plate. Tri-drive screws. GFCIs with Auto-Ground assure a positive ground to metal box.
Specifications	
<ul style="list-style-type: none"> Supply Voltage: 125VAC, 60 Hz Supply Voltage Range: 102-132 VAC Trip Threshold: 5± 1mA 	<ul style="list-style-type: none"> Trip Time: 0.025 sec., nominal per UL Standard 20 Amp feed-thru capacity

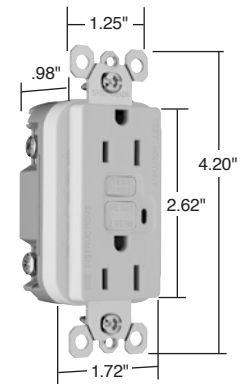

1595W

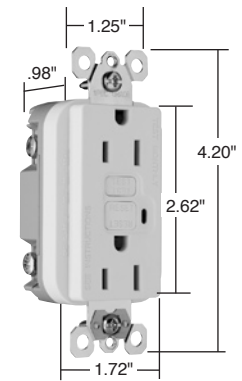

1595SW

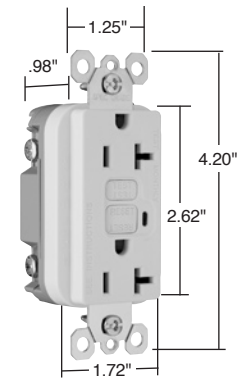

2095W



NEMA 5-15R



NEMA 5-20R

Catalog Number	Rating A.	VAC	Color	NEMA Config. No.	3rd Party Compliance		
					UL943 C22.2 No. 144	UL498 C22.2 No. 42	FSUL WC596
TradeMaster®/Spec Grade 15 Amp Duplex GFCI							
1595I	15	125	Ivory	5-15R	•	•	•
1595W	15	125	White	5-15R	•	•	•
1595	15	125	Brown	5-15R	•	•	•
1595GRY	15	125	Gray	5-15R	•	•	•
1595BK	15	125	Black	5-15R	•	•	•
1595RED	15	125	Red	5-15R	•	•	•
1595LA	15	125	Light Almond	5-15R	•	•	•
TradeMaster®/Spec Grade 15 Amp Duplex GFCI with Auto-Ground							
1595SI	15	125	Ivory	5-15R	•	•	•
1595SW	15	125	White	5-15R	•	•	•
1595SLA	15	125	Light Almond	5-15R	•	•	•
Specification Grade 20 Amp Duplex GFCI							
2095I	20	125	Ivory	5-20R	•	•	•
2095W	20	125	White	5-20R	•	•	•
2095	20	125	Brown	5-20R	•	•	•
2095GRY	20	125	Gray	5-20R	•	•	•
2095BK	20	125	Black	5-20R	•	•	•
2095RED	20	125	Red	5-20R	•	•	•
2095LA	20	125	Light Almond	5-20R	•	•	•
Specification Grade 20 Amp Duplex GFCI with Auto-Ground							
2095SI	20	125	Ivory	5-20R	•	•	•
2095SW	20	125	White	5-20R	•	•	•
2095SLA	20	125	Light Almond	5-20R	•	•	•

For Configurable Solutions, see Page U-1.

Available in Bulk Packaging, i.e. 1595W20 is 20 pack, 1595W100 is 100 pack. Please contact Customer Support at 1-800-223-4189.

All devices listed on this page conform to NEMA WD-1 and WD-6.

TradeMaster® & Spec Grade GFCI Receptacles